


SP-SRS Submerged Rails System



SP-SRS Submerged rail system



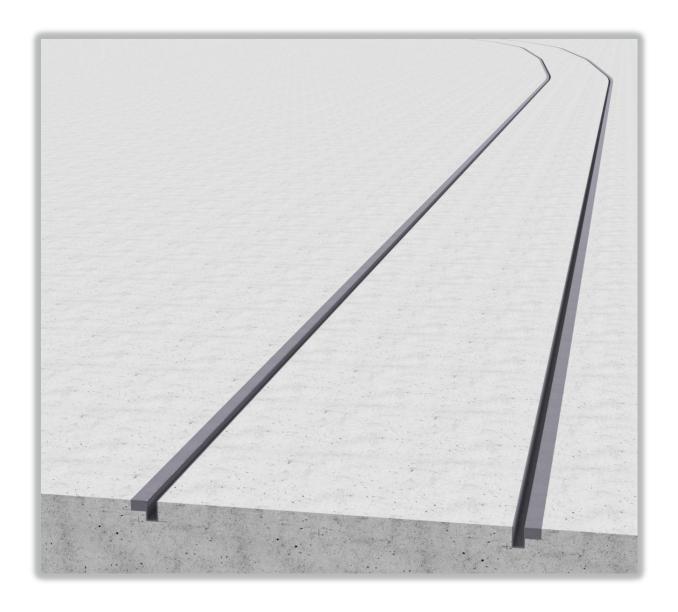



Rails with sealings

SP-SRS Submerged Rails System is a rail system that is completely in level with the floor. The system is unique, where a compressor bar sealing prevents dirt accumulation in the track.

The rail system can be delivered with two types of guide rail: 50x30 mm or 60x40 mm. Rail type: S355 J0 according to EN 10025-2 with two rounded corners.

Sealings special sponge rubber.

SP-SRS delivered in lengths and curvature as desired, with mounting holes Ø12 mm per. app. 0.5 m. This ensures easy installation and adjustment of rails. (For correct distance between rails and faster assembly, specially designed "spacers" can be included.)

Advances:

Using SP-SRS ensures a completely flat floor. This ensures a much easier ride with example. trucks, forklifts, etc., but not least it prevents falls, in addition, cleaning the floor with sweepers / washing machines etc. is now possible.